

## APPLICATIONS

Signal connectors for harsh environments



### ADVANTAGES

- Quick connect
- Small size
- Overmolding structure, clean and flexible
- RoHS and Reach Compliant

## SPECIFICATIONS

Mating Cycle:  $\geq 200$  Times

Pullout Force:  $< 30N$

Wire processing: Solder

Voltage Rating: 60V DC

Current Rating: 2A

Withstand Voltage: 500V AC

Insulation Resistance:  $> 20M\Omega$

Operating Temperature:  $-25^{\circ}C$  to  $80^{\circ}C$

IP Rating: IP66 Mated


Salt Spray: 48h

Flammability Rating: UL94V-0

Wire Gauge: 24AWG/ Max

## DIMENSIONS

Male Plug

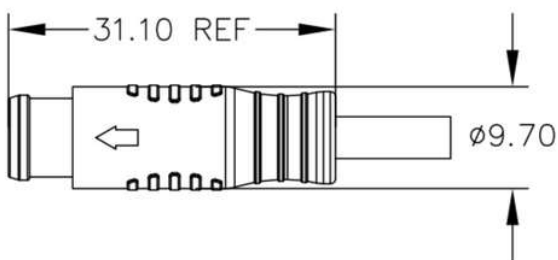

Female Plug

