


SLK-79-OEM

DATE	CHANGES	INTL	REV
09.04.08	Original	JB	1.00

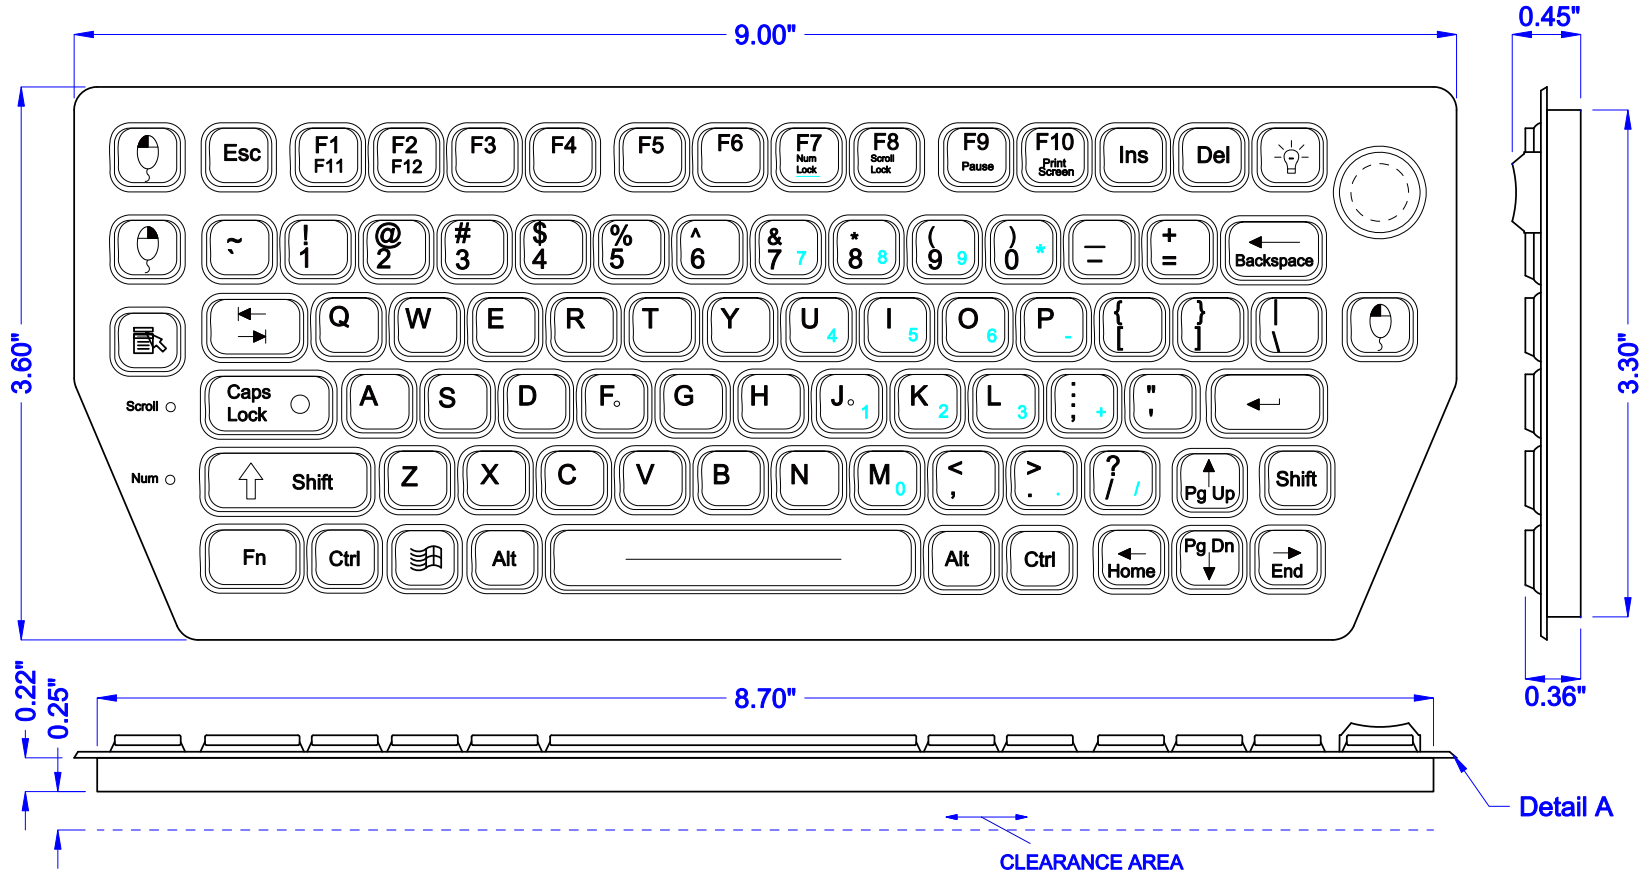

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
LIFE: Greater Than 10 Million Cycles
TRAVEL: 0.055 in.
ACTUATION FORCE: 4.76 oz. +/- 1.06oz (135g +/- 30g)
FEEDBACK: Tactile with Mechanical Snap

POWER

PS2: KEYBOARD: 200mA@5V (from Keyboard port)
POINTER: 35mA@5V (from Mouse port)
USB: 235mA@5V (from CPU port)

TEMPERATURE RANGE

STORAGE: -40°F to +158°F (-40°C to +70°C)
OPERATING: -4°F to +140°F (-20°C to +60°C)

HUMIDITY

100% Humidity Resistant

VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ
FREQUENCY RANGE: 20Hz-2Khz
DURATION OF TEST PER AXIS: 3 hours

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis


WEIGHT

0.75 lbs +/- 0.10 lbs (0.34 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:1.25

SLK-79-OEM MOUNTING

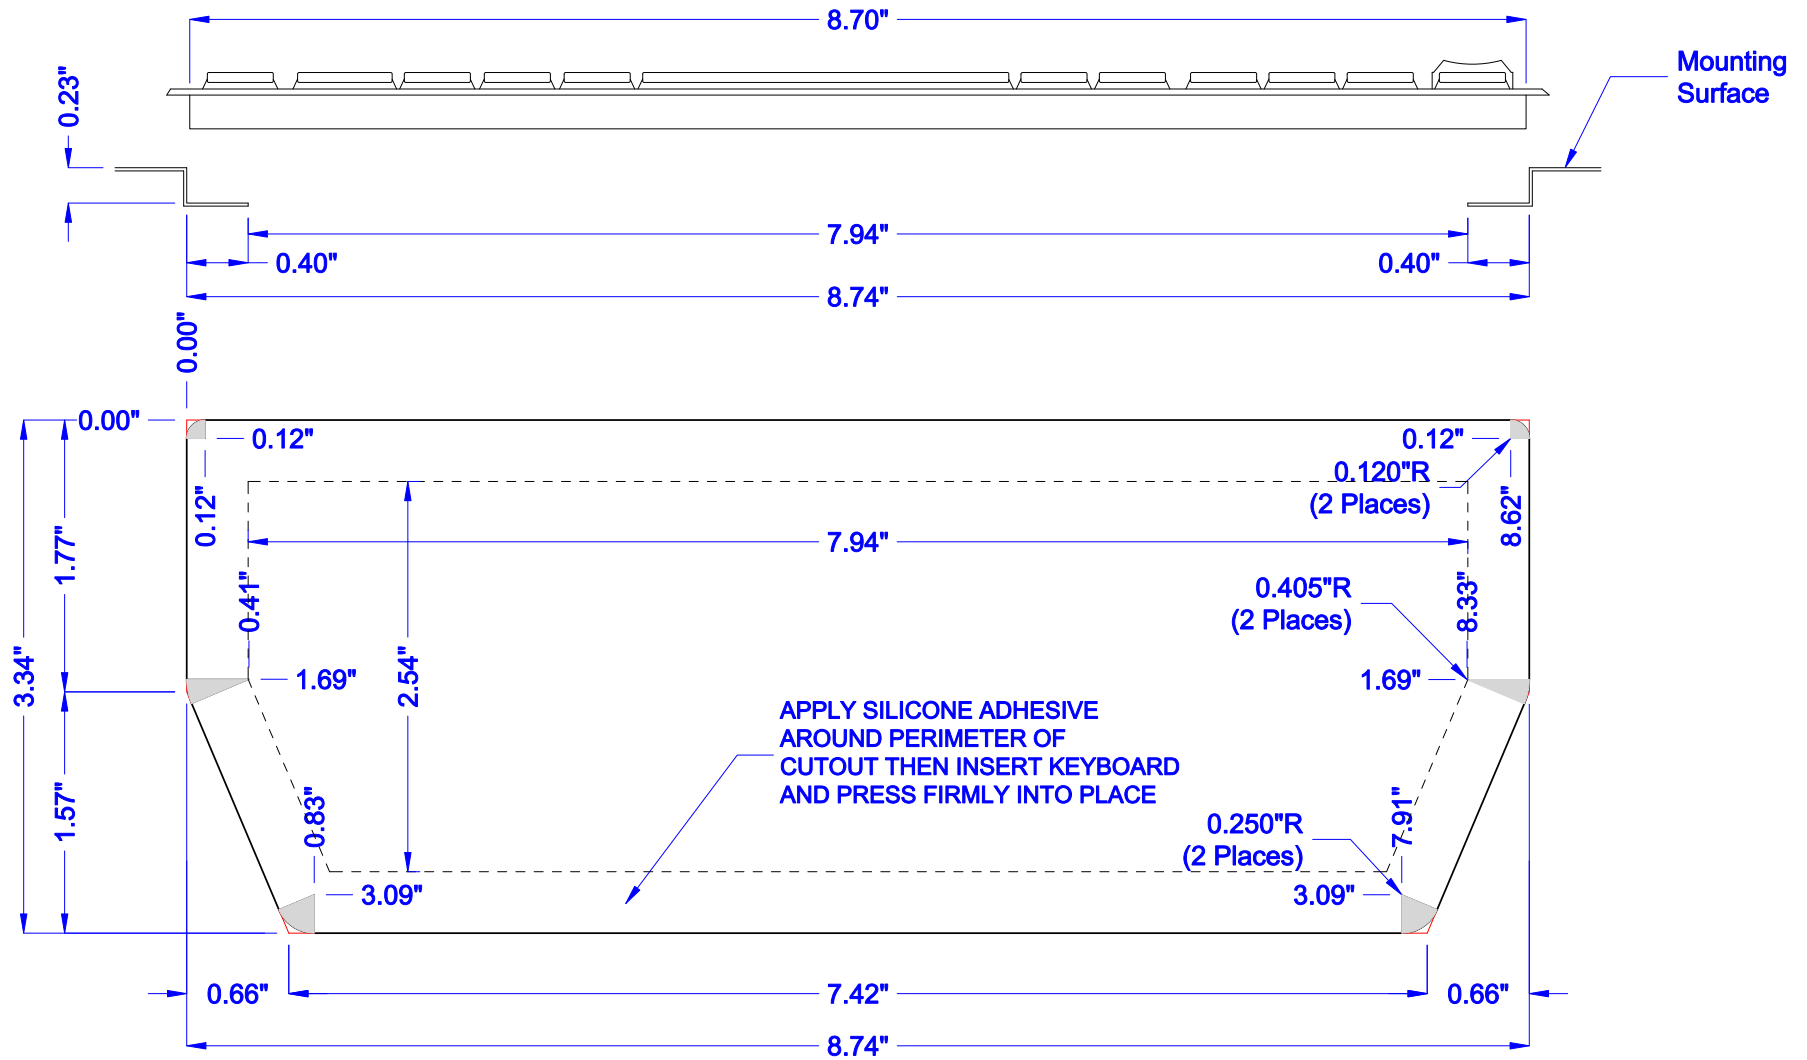

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:1.25



iKey, Ltd.
2621 Ridgpoint Dr. Suite 235
Austin, Texas 78754

©2008 iKey, Ltd.
Voice: (512) 897-0283
Fax: (512) 927-8830

Part Number: SLK-79-OEM

Drawing Title: SLK-79-OEM

Drawing Number: MKT0141

Revision: 1.00

Sheet: 2 OF 2

Date: 09.04.08

JWB