


SLK-101-FL

DATE	CHANGES	INTL	REV
12.04.03	Original	JE	1.0
03.19.12	Updated Technical Information	TH	1.1

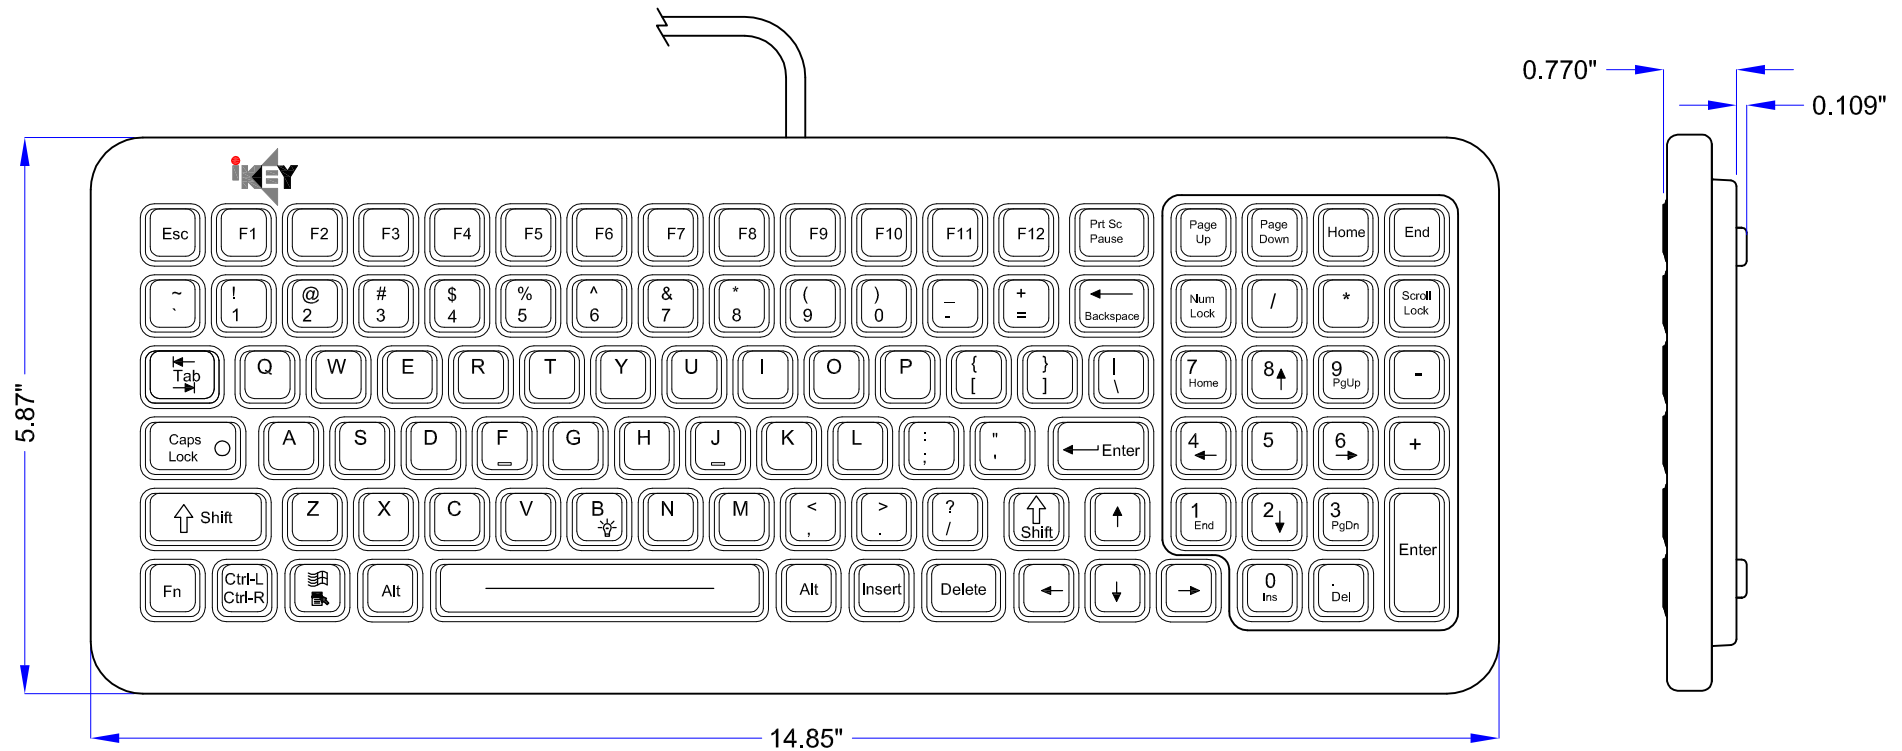

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
 LIFE: Greater Than 10 Million Cycles
 TRAVEL: 0.040 in.
 ACTUATION FORCE: 6.35 oz. +/- 1.06oz (180g +/- 30g)
 FEEDBACK: Tactile with Mechanical Snap

POWER

KEYBOARD: 5V@20A (from CPU port)

TEMPERATURE RANGE

STORAGE: -40°F to +194°F (-40°C to +90°C)
 OPERATING: -40°F to +140°F (-40°C to +60°C)

HUMIDITY

100% Humidity Resistant

FLAMMABILITY

PRINTED CIRCUIT BOARD: 94V0
 SILICONE OVERLAY: 94HB
 INTERFACE CABLE: 94V0

VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ
 FREQUENCY RANGE: 20Hz-2Khz
 DURATION OF TEST PER AXIS: 3 hours

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT

1.8 lbs +/- 0.10 lbs (0.8 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.
 2621 Ridgely Dr. Suite 235
 Austin, Texas 78754

©2012 iKey, Ltd.
 Voice: (512) 837-0283
 Fax: (512) 927-8530

Part Number: SLK-101-FL
 Drawing Title: SLK-101-FL-MKT

Drawing Number: MKT0010
 Revision: 1.1

Sheet: 1 OF 1
 Date: 03.19.12

TWH