


SLK-102-TP-FL

DATE	CHANGES	INTL	REV
12.09.08	Original	JB	1.00

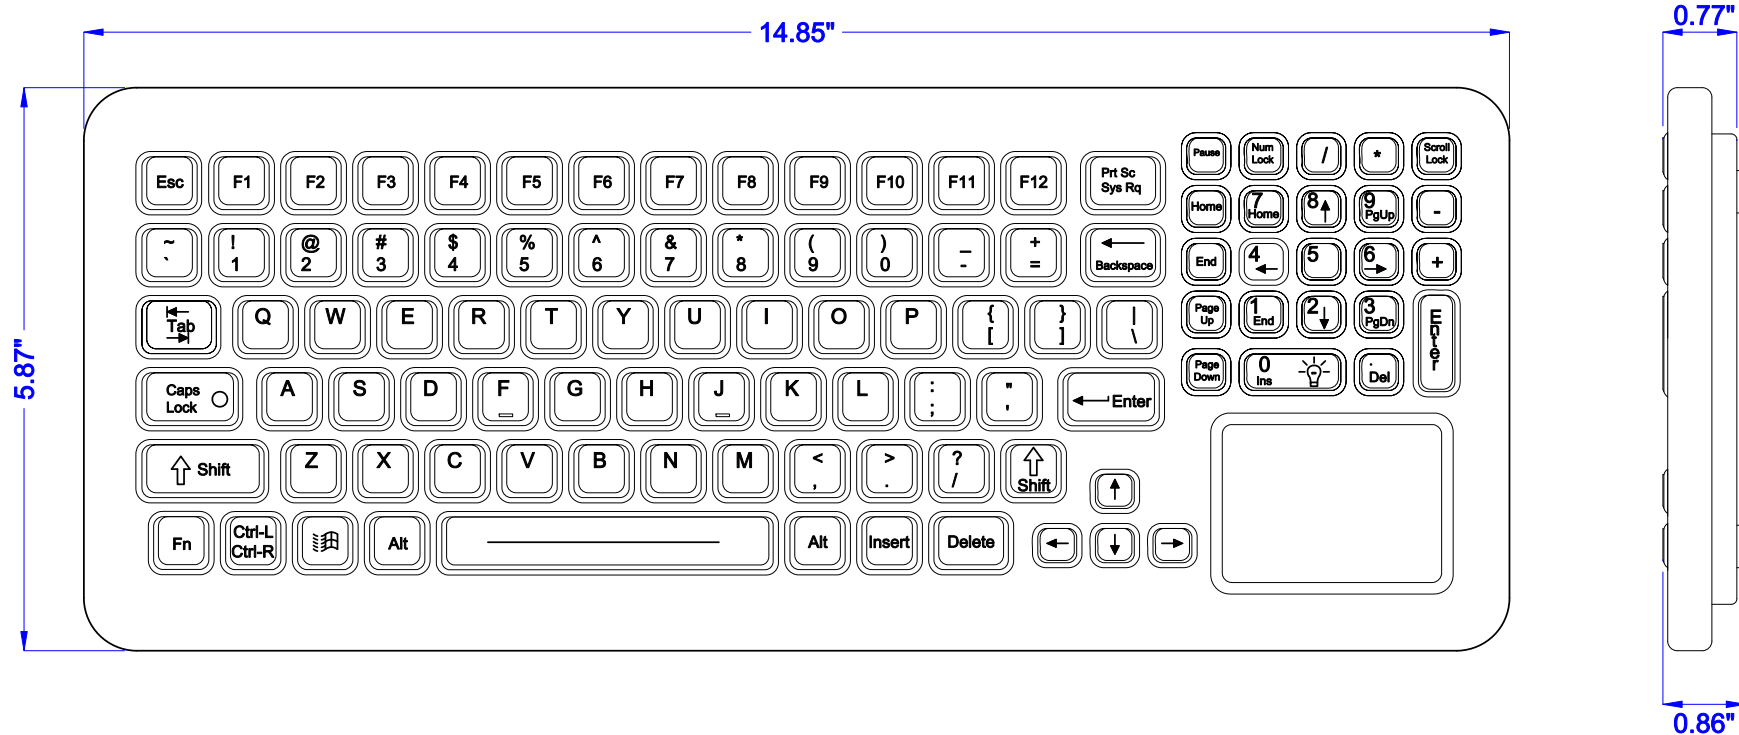

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
LIFE: Greater Than 10 Million Cycles
TRAVEL: 0.040 in.
ACTUATION FORCE: 4.76 oz. +/- 1.06oz (135g +/- 30g)
FEEDBACK: Tactile with Mechanical Snap

POWER

USB: 210mA@5V (from CPU port)

TEMPERATURE RANGE

STORAGE: -40°F to +149°F (-40°C to +65°C)
OPERATING: +32°F to +140°F (0°C to +60°C)

HUMIDITY

100% Humidity Resistant

VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ
FREQUENCY RANGE: 20Hz-2Khz
DURATION OF TEST PER AXIS: 3 hours

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT

1.75 lbs +/- 0.10 lbs (0.79 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.
 2621 Ridgpoint Dr. Suite 235
 Austin, Texas 78754

©2008 iKey, Ltd.
 Voice: (512) 837-0283
 Fax: (512) 927-8630

Part Number: SLK-102-TP-FL
Drawing Title: SLK-102-TP-FL-MKT

Drawing Number: MKT0157
Revision: 1.00

Sheet: 1 OF 1
Date: 12.09.08
JWB