
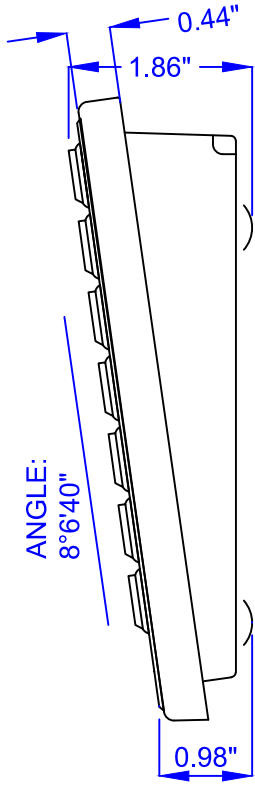
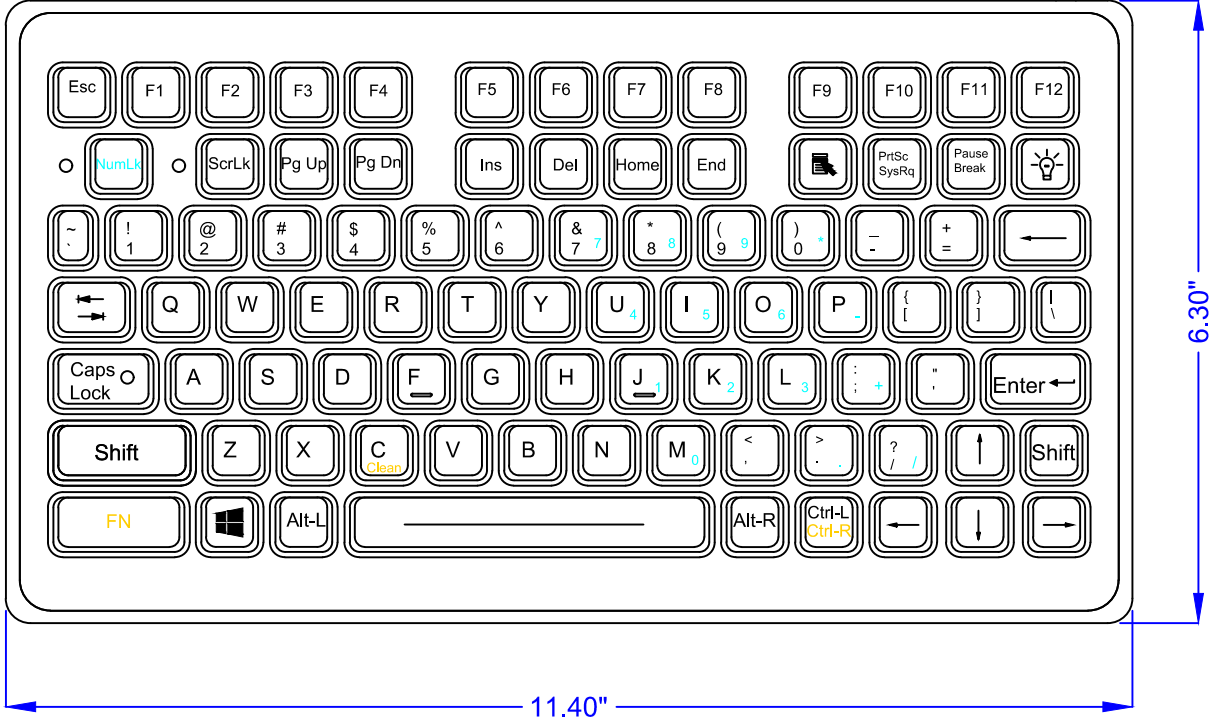
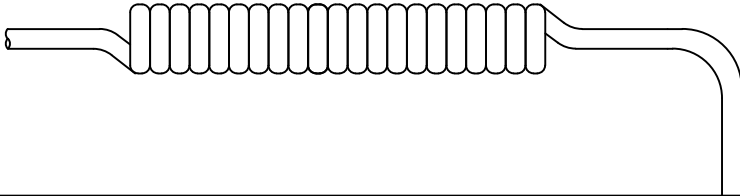



DATE	CHANGES	INTL	REV
07.28.08	Original	JB	1.00

**DP-88-OEM**



**KEY SWITCH**

MATERIAL: Industrial Silicone Rubber  
 LIFE: Greater Than 10 Million Cycles  
 TRAVEL: 0.055 in.  
 ACTUATION FORCE: 7.05 oz. +/- 1.06oz (200g +/- 30g)  
 FEEDBACK: Tactile with Mechanical Snap

**TEMPERATURE RANGE**

STORAGE: -40°F to +194°F (-40°C to +90°C)  
 OPERATING: -40°F to +158°F (-40°C to +70°C)

**VIBRATION**

POWER SPECTRAL DENSITY: .04g/HZ  
 FREQUENCY RANGE: 20Hz-2Khz  
 DURATION OF TEST PER AXIS: 3 hours

**POWER**

PS2: KEYBOARD: 50mA@5V (from Keyboard port)  
 USB: 50mA@5V (from CPU port)

**HUMIDITY**

100% Humidity Resistant

**SHOCK**

3 X 11 ms pulses of 50g on each of 3 axis

**WEIGHT**

2.00 lbs +/- 0.10 lbs (0.91 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2

**iKey** iKey, Ltd.  
 2621 Ridgpoint Dr. Suite 235  
 Austin, Texas 78754  
 Voice: (512) 837-0283  
 Fax: (512) 927-8530

Part Number: DP-88-OEM  
 Drawing Title: DP-88-OEM-MKT

Drawing Number: MKT0131  
 Revision: 1.00

Sheet: 1 OF 2  
 Date: 07.28.08  
 JWB

# DP-88-OEM MOUNTING

